



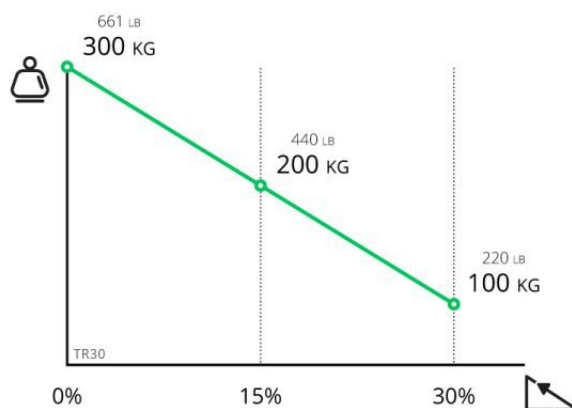

Z107.720-4===

Technical drawing

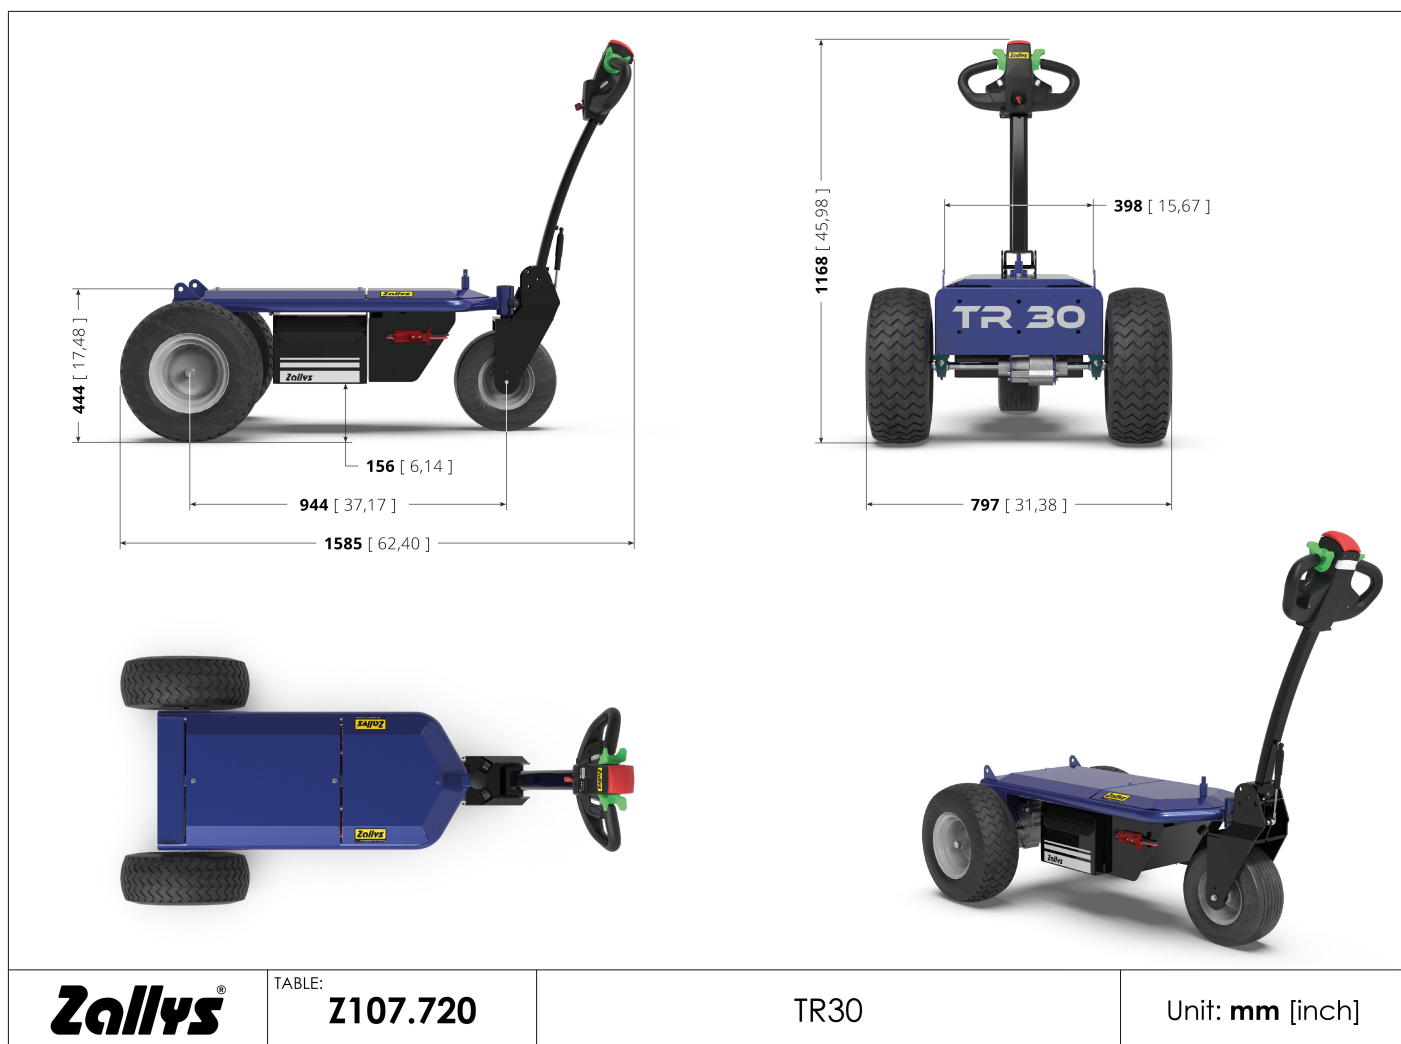

Technical data

1. Characteristics

Réf.no.	Description	U.M.	Valeur
1.01	Model number		Z107.720-4===
1.02	Model name		TR 30
1.03	Manufacturer		Zallys
1.04	Operator		Pedestrian
1.05	Power unit		Electric
1.07	CE certification		
1.08	Plant tension	V	24
1.09	Nominal power	kW	0,60

1. Frame characteristics

Réf.no.	Description	U.M.	Valeur
1.80	Frame made of		Steel
1.82	Anti-Corrosion Treatment (on customer demand only)		Cataphoresis
1.83	Frame treatment		Polyester powder coating

2. Safety data

Réf.no.	Description	U.M.	Valeur
2.01	Dead man safety system		Sensor on tiller head
2.02	Emergency reverse button		On tiller head
2.04	Creep speed device		Button on tillerhead
2.06	Power supply disconnection device / Emergency stop		Detachable power connector
2.10	Acoustic signaling		Claxon/cicalino
2.11	Drive controls		Maintained action switch
2.20	Handarm vibration	m/s ²	<2,5
2.22	Noise level at operator's ears	dB	<70

3. Performances

Réf.no.	Description	U.M.	Valeur
3.01	Max. forward speed	km/h	5,5
3.04	Max. backward speed	km/h	5,5

Réf.no.	Description	U.M.	Valeur
3.11	Max.load capacity on flat ground	kg	300
3.28	Max.slope with load *	%	30
3.39	Stopping distance in deceleration (without load)	m	1,1
3.42	* Load capacity is subject to kind of slope , kind of floor and operating time		

4. Drive controls

Réf.no.	Description	U.M.	Valeur
4.01	Type of control		Tillerhead
4.02	Type of start control		Butterfly lever

5. Standard battery specifications

Réf.no.	Description	U.M.	Valeur
5.01	Batteries		2
5.02	Batteries type		Traction AGM batteries
5.03	Battery voltage	V	12
5.04	Nominal Capacity 5 h	Ah	72
5.05	Nominal Capacity 20 h	Ah	96
5.06	Weight of each battery	kg	23

6. Available chargers

Réf.no.	Description	U.M.	Valeur
6.40	Standard voltage	V	220/240
6.41	Multitension	V	110/240
6.42	Plug		In use in the country of destination

6. Technical data of standard charger

Réf.no.	Description	U.M.	Valeur
6.01	Battery charger		External - high frequency
6.02	Input voltage	V	110/240
6.03	Input Frequency	Hz	50-60
6.04	battery charger voltage type		Monophase
6.05	Battery charger capacity	Ah	8
6.06	Power consumption during complete charge cycle	kWh	2
6.07	Operating temperature	°C	-20 / +40
6.08	Operation display		Led

Réf.no.	Description	U.M.	Valeur
6.09	Input fuse	A	5
6.10	Cooling system		Ventilation cooling
6.11	IP degrees of protection		IP20
6.12.1	Width	mm	95
6.12.2	Length	mm	185
6.12.3	Height	mm	55

7. Drive motor

Réf.no.	Description	U.M.	Valeur
7.02	Motor code no.		M512.013
7.03	Engine		Electric
7.04	Electricity		Direct current
7.05	Engine voltage	V	24
7.10	Rating (S2 - 10')	kW	0,60
7.15	Maximum peak power	kW	1,6

8. Generic technical data

Réf.no.	Description	U.M.	Valeur
8.01	Transmission system		Mechanical
8.02	Transmission lubrication		In oil bath
8.03	Gear reduction		1:32
8.04	Kind of oil		80W-90
8.06	Service brake		Electronic
8.08	Parking brake		Electro-Mechanical

9. Weight

Réf.no.	Description	U.M.	Valeur
9.01	Weight without batteries	kg	72
9.09	Weight incl. 72/96A AGM batteries	kg	118

11. Standard wheels

Réf.no.	Description	U.M.	Valeur
11.25	Inflation pressure	bar	2/(3 con carico)